


## Anti Wave Swimming Lane

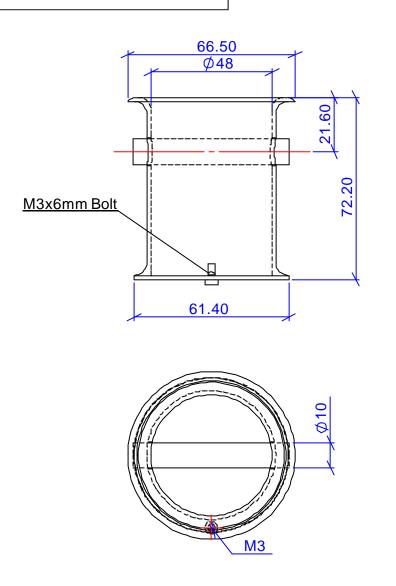


Note:

1. The material of the Anchoris Stainless steel 316.

ſ		Project Name:				Product Na	ame:	Project No.	AWE00130	Product No.	03
	The information contained in this drawing is the sole property of ANTI WAVE, any reproduction in part or as a whole	Swimming Lane			ane		Lane Anchor Drawn Date 2		2007-04-26	Verify Date	
		Drawn	Philip	Scale	No	Patents	2001285610;710	0219;404867	7;01818714	.5 & 2003/292	20 e.g.

## Open Drawing

## Anti Wave Swimming Lane

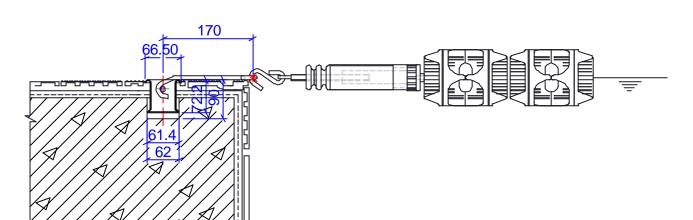


Note:


- 1. Core drill a hole which is 62mm wide and 90mm deep.
- 2. Chisel out the back of the hole to a wedge-shaped profile as shown, using a small jack hammer drill.
- 3. Tape up around the edge of the hole with duct tape to minimise mess.
- 4. Make a firm stiff mix of 2-part vertical application epoxy (enough for two holes at a time). You may wish to add a little fine sand to the mix.
- 5. Coat the inside of the hole and the back of the anchor; use more than you need.
- 6. Push the anchor in and turn to seat correctly. Reuse the excess mixture which oozes from the hole to start the next anchor.


7. Clean up and allow one week before stressing the anchor.


	PROPRIETARY AND CONFIDENTIAL				Product Name: Lane Anchor Installation				Product No.	
	The information contained in this drawing is the sole property of ANTI WAVE,						Drawn Date	2007-04-26	Verify Date	
	©ANTI WAVE 2007 ANTI WAVE is prohibited.	Drawn Philip	Scale			2001285610; 7100				

**Open Drawing** 

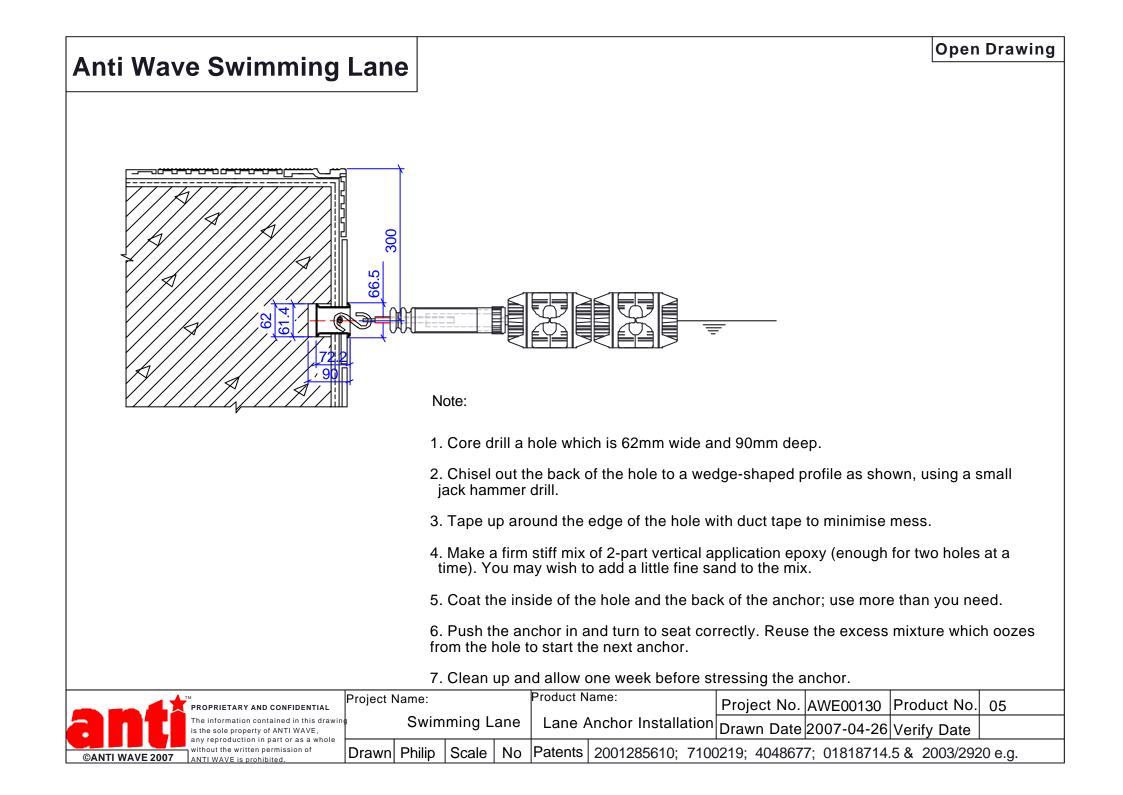

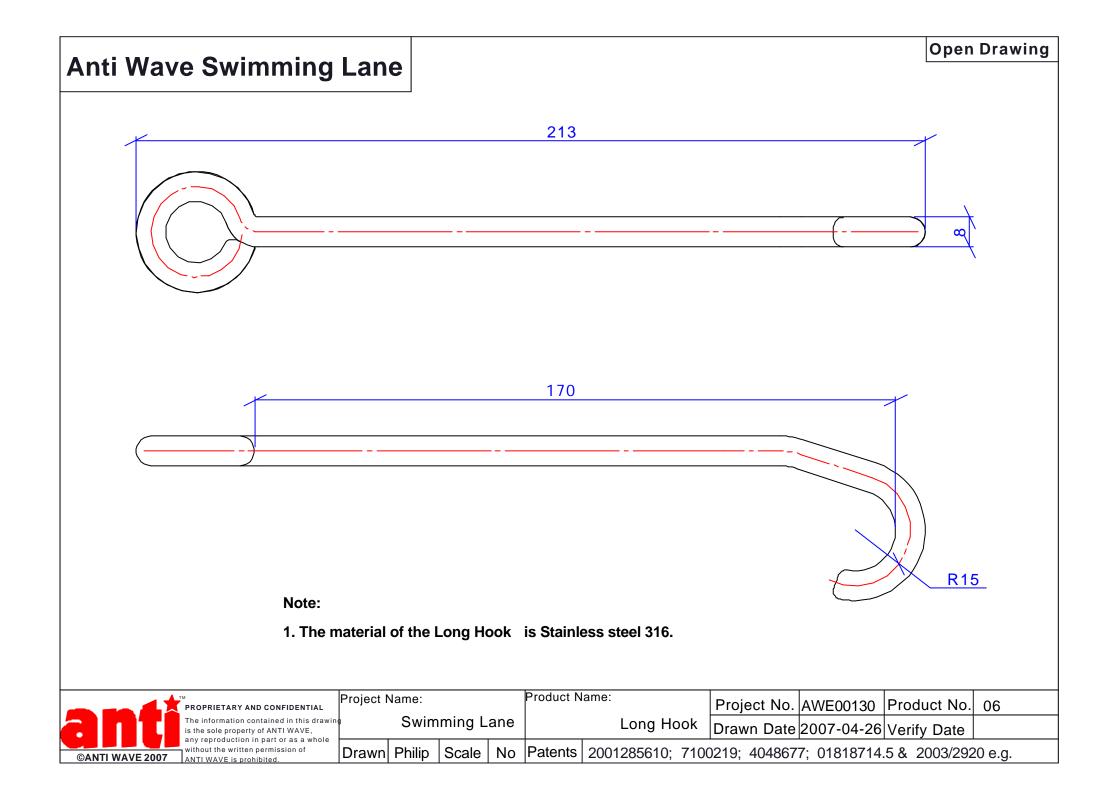

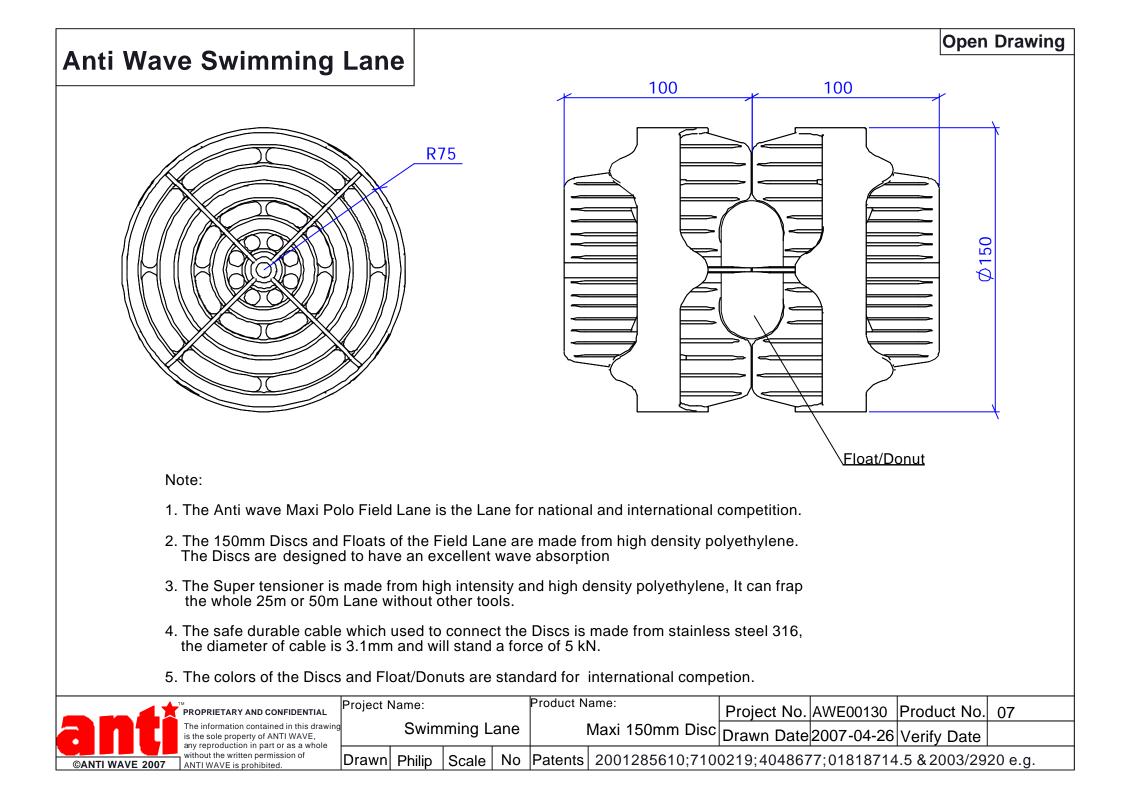

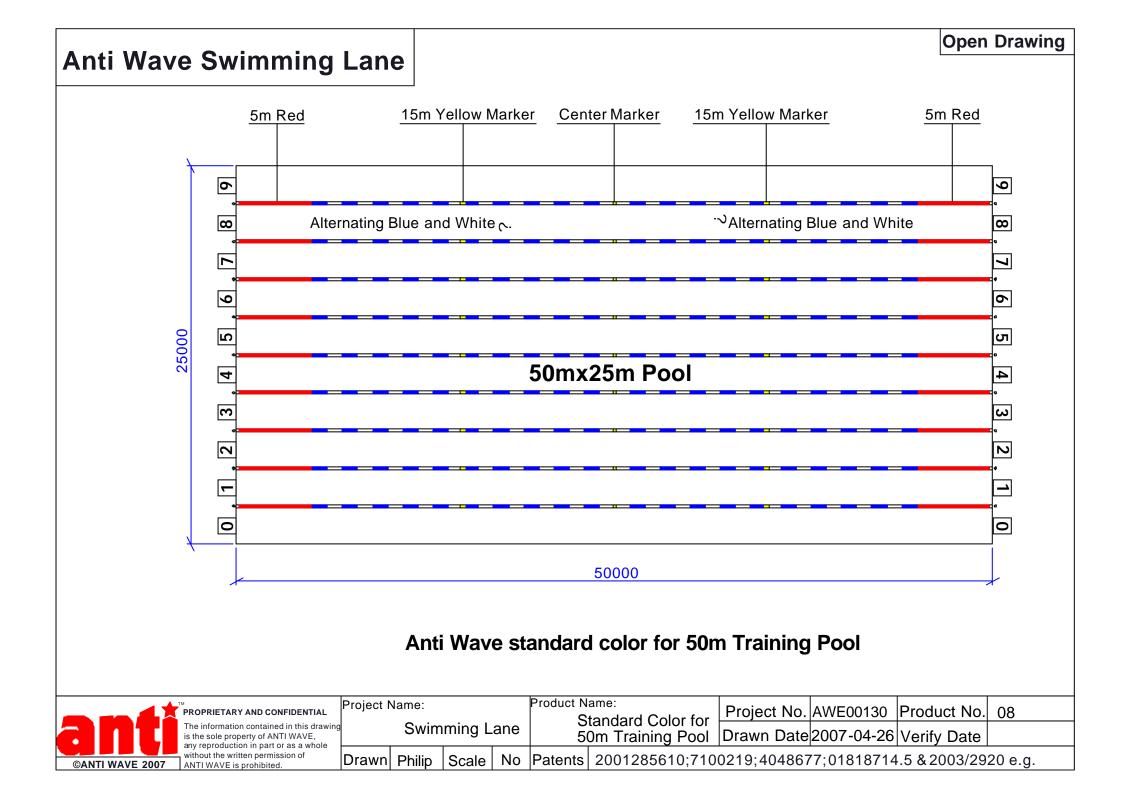

## Anti Wave Swimming Lane

**Open Drawing** 

